

# wall mounted

## air conditioners



### Total comfort



ASY7F/9F/12F/7U

Stylish and slim, these elegant wall-mounted units complement any interior décor and are suitable for a variety of applications. The Fujitsu range of wall-mounted air conditioners includes a powerful cooling air outflow which gradually lowers the room temperature to the required condition in the minimum time but at maximum efficiency.

- Slim-line construction
- Adjustable air flow
- Cooling/heating
- Ultra quiet
- Washable air filter
- Easy-to-use remote controller
- Quick and easy installation
- 3-stage filtration process

# wall mounted



ASY14F/14U



ASY24E/24E(3)/30E/30E(3)  
ASY18F/24F/30F/18U/24U/30U



ASY9L/12L



ASY9U/12U

Our wall-mounted range of air-conditioners are available in a number of different sizes making them versatile and adaptable for any interior environment.

- Small units such as the 7, 9 and 12 systems offer an auto swing feature which automatically distributes air for maximum comfort.
- Medium units, which include the 14 model have selectable 6-step auto swing features, giving greater control over your environment.
- The large units, models 18 through to 30 have double auto swing and omni-directional control, allowing you to heat or cool a large area economically and efficiently.



Handy Controller

## Cooling



		Cooling Only - R407C			
	Indoor	ASY24E	ASY24E(3)	ASY30E	ASY30E(3)
	Outdoor	AOY24E	AOY24E(3)	AOY30E	AOY30E(3)
Super Quiet		✓	✓	✓	✓
Super Power		✓	✓	✓	✓
Moisture Removal		✓	✓	✓	✓
Up/Down Swing Flaps		✓	✓	✓	✓
Auto Double Swing		✓	✓	✓	✓
Auto Flaps		✓	✓	✓	✓
Auto Shut Flaps		✓	✓	✓	✓
Auto Air Flow Adjustment		✓	✓	✓	✓
Auto Restart		✓	✓	✓	✓
Sleep Timer		✓	✓	✓	✓
Program Timer		✓	✓	✓	✓
Auto-Changeover		N/A	N/A	N/A	N/A
Nominal Capacity (kW)	Cooling	6.90	7.10	8.00	8.00
	Heating	N/A	N/A	N/A	N/A
Dimensions (HxWxD) mm	Indoor	320x1120x220	320x1120x220	320x1120x220	320x1120x220
	Outdoor	700x900x350	700x900x350	900x900x350	900x900x350
Net Weight (kg)	Indoor	16	16	16	16
	Outdoor	70	70	77	77
Room Air Circulation (high)	m <sup>3</sup> /h	950	950	1050	1050
Power Supply	V - PH - Hz	240 - 1 - 50	415 - 3 - 50	240 - 1 - 50	415 - 3 - 50
Power Supply To		OUT	OUT	OUT	OUT
Running Current	A	12.4	4.6	16.3	5.9
Starting Current	A	61	32	82	32
Fuse Rating	A	20	10	30	10
Power Consumption	kW	2.64	2.92	3.40	3.40
Interconnecting Cable		3 + E	3 + E	3 + E	3 + E
Remote Control Type		Handy	Handy	Handy	Handy
Noise Levels (dB(A))	Indoor L/M/H	35/40/44	35/40/44	40/44/47	40/44/47
	Outdoor	55	55	55	55
Max Pipe Length	m	20	25	30	30
Max Height Difference	m	8	15	15	15
Refrigerant Charge	m	7.5	7.5	7.5	7.5
Pipe Size (inches)	Gas	5/8	5/8	5/8	5/8
	Liquid	3/8	3/8	3/8	3/8
Operating Range (°C)	Cooling	21 ~ 43	0 ~ 43	0 ~ 43	0 ~ 43
	Heating	N/A	N/A	N/A	N/A
Refrigerant		R407C	R407C	R407C	R407C

Cooling & Heating capacities are based on the following conditions:

**Cooling:** Indoor Temp.: 27°C DB/19°C WB, Outdoor Temp.: 35°C DB/24°C WB

**Heating:** Indoor Temp.: 20°C DB, Outdoor Temp.: 7°C DB

**Note:** Fuse ratings shown are only for information. Any fuses or MCB's installed on-site should be sized in accordance with I.E.E. regulations.

**For full installation details please contact your local distributor**






# wall mounted

[www.fujitsu-general.co.uk](http://www.fujitsu-general.co.uk)




## Double Auto Swing omni-directional air flow control

Right and left

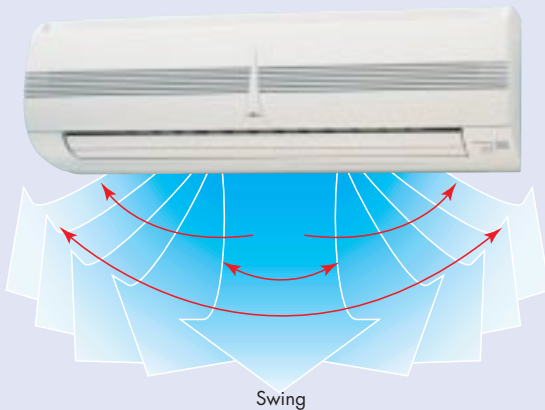

Up and down

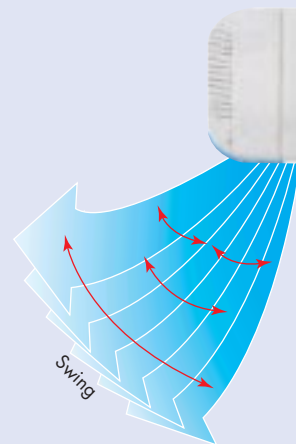

### Total control at your fingertips

These unique multi-dimensional air direction conditioners are lightweight and produce conditioned air which, due to the unit's filtration process, is also clean. A long-life washable air filter makes maintenance speedy and simple. Adjustable via a remote control, these units are easy to install and ideal for small premises.



The company reserves the right to make any variation in specification to the equipment described or to withdraw or replace products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form any part of any contract.

Fujitsu General (U.K.) Co. Limited, Unit 150, Centennial Park, Elstree, Herts. WD6 3SG Tel 020 8731 3450 Fax 020 8731 3451

# FUJITSU